


LAYAR LED DALAM RUANG

**Microvision**  
Realizing Your Full Idea

**Microvision**  
**MVI HL MDI 1919 - 3.0**  
MODULAR INDOOR

Pilihan Terbaik Untuk  
Media Digital Dalam Ruang

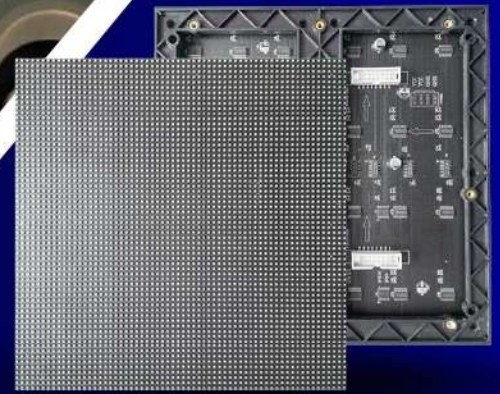

KECERAHAN TINGGI



BERBAGAI CARA  
PEMASANGAN



TAHAN LAMA

**MDI**  
MODULAR INDOOR

Model fix installation, modul langsung dipasang pada bracket atau konstruksi LED display



**Aplikasi :**

Auditorium, Lobi, Ruang Kontrol, Ruang Rapat, Ruang Serbaguna, Ruang Galeri, Tempat Ibadah, Retail, Dll.

**SPECIFICATION****MVI HL MDI 1919 - 3.0**

Pixel Pitch	3 mm
Module size	192*192mm
Pixel density	111111 dots/m <sup>2</sup>
LED lamp	SMD2121
Module resolution	64*64
Viewing distance	3-25M
Max power consumption	900W/m <sup>2</sup>
Drive mode	1/32scan
Brightness	800cd/m <sup>2</sup>
Refresh rate	>1920Hz/s
Life time	>100,000 hours
Defect rate	<0.0001
Temperature range storage	-20-65°C
Temperature range working	-20 to 50°C
Gray scale/color	4096 grades for R, G and B
Working voltage	110/220V/AC
Viewing angle horizontal	120°
Viewing angle vertical	120°"
Display content	videos, pictures and graphics
Operating humidity	10-90%
Storage humidity	10-90%

\* data diatas dapat berubah tanpa pemberitahuan sebelumnya