


LAYAR LED DALAM RUANG

Microvision
Realizing Your Full Idea

Microvision
MVI HL MDI 2525 - 3.9
MODULAR INDOOR

Pilihan Terbaik Untuk
Media Digital Dalam Ruang

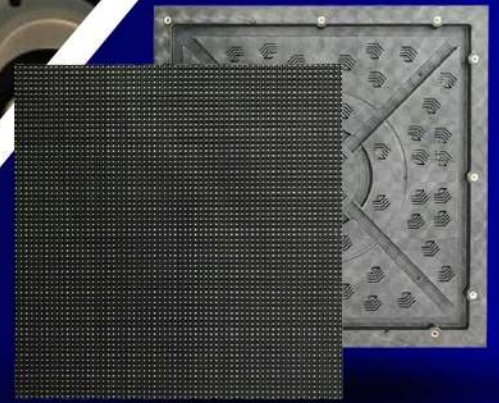

KECERAHAN TINGGI



BERBAGAI CARA
PEMASANGAN



TAHAN LAMA

MDI
MODULAR INDOOR

Model fix installation, modul langsung dipasang pada bracket atau konstruksi LED display



Aplikasi :

Auditorium, Lobi, Ruang Kontrol, Ruang Rapat, Ruang Serbaguna, Ruang Galeri, Tempat Ibadah, Retail, Dll.

SPECIFICATION**MVI HL MDI 2525 - 3.9**

Pixel Pitch	3.91 mm
Module size	250*250mm
Pixel density	65536 dots/m ²
LED lamp	SMD2121
Module resolution	64*64
Viewing distance	4-30M
Max power consumption	900W/m ²
Drive mode	1/16scan
Brightness	>800cd/m ²
Frame frequency	60Hz/s
Refresh rate	>1920Hz/s
Life time	>100,000 hours
Defect rate	<0.0001
Temperature range storage	-20-65°C
Temperature range working	-20 to 50°C
Gray scale/color	4096 grades for R, G and B
Working voltage	110/220V/AC
Viewing angle horizontal	120°
Viewing angle vertical	120°"
Display content	videos, pictures and graphics
Operating humidity	10-90%
Storage humidity	10-90%

* data diatas dapat berubah tanpa pemberitahuan sebelumnya